

STOP THE FOREIGN MATERIALS


HYPER MAX

HM Series

HMQ-3205 · HMT-3205 · HMD-3205



Dimensions

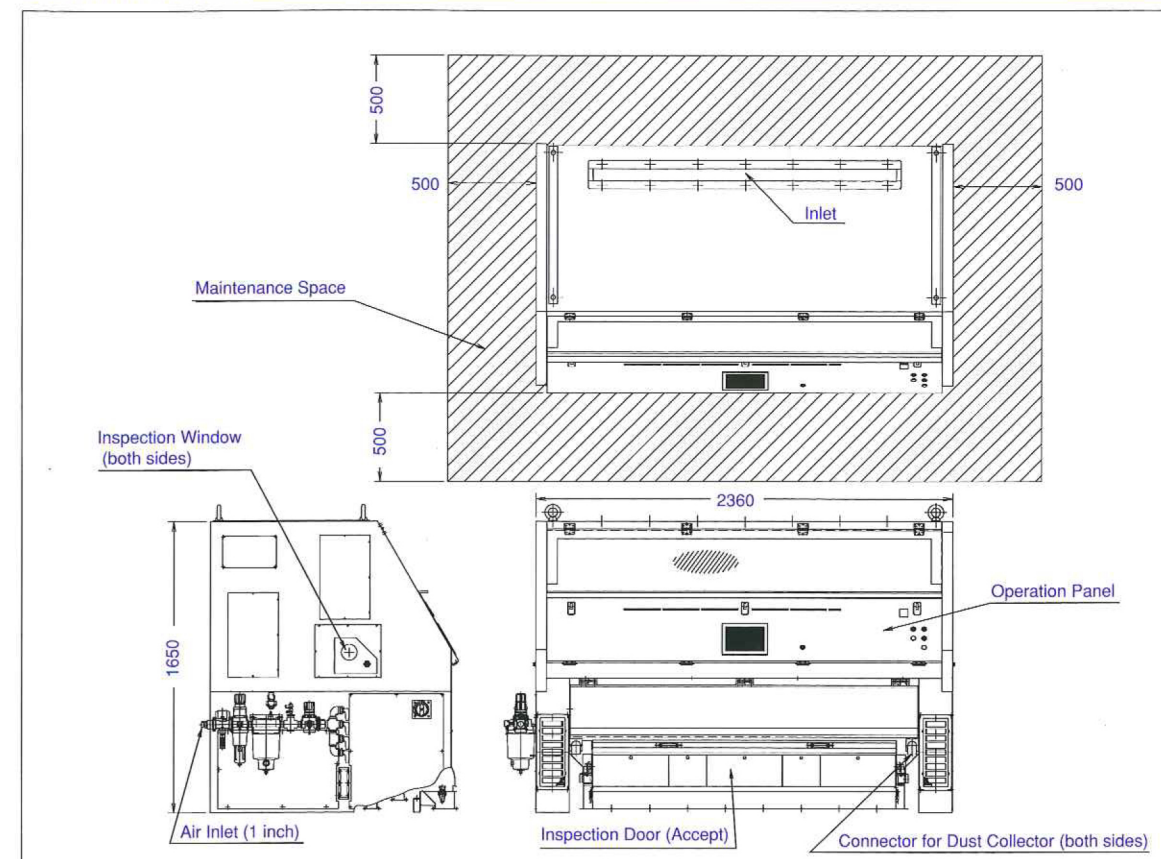

Specifications

HYPER MAX < HMQ-3205 · HMT-3205 · HMD-3205 >

	HMQ-3205 Super Closer Type	HMT-3205 Closer Type	HMD-3205 Set Upper Type
Capacity for White Rice (short grain) with 0.01%~3% contamination for 1st sort only. ※1	25t/h~10 t/h	25t/h~10 t/h	25t/h~10 t/h
Length (mm)	1410	1410	1410
Width (mm)	2360	2360	2360
Height (mm)	1650	1650	1650
Power Consumption ※2	3-Phase 200V	3-Phase 200V	3-Phase 200V
Normal	4.6 kw	4.6 kw	4.3 kw
Max.	6.15 kw	6.15 kw	5.85 kw
Air Requirements(Liter/min) ※1	1500~3500	1500~3500	1500~3500
Required Air Volume for Dust Collection	20 m3/min.	20 m3/min.	20 m3/min.
Weight (kg)	1370	1370	1370
Chute Type	Plain or U-shape	Plain or U-shape	Plain or U-shape
No. of Chute (Width 200mm)	8	8	8
NIR Sensor	Front + Rear	Front	N/A
Memory No.	100	100	100

※1 Capacity of feeding material, Power Consumption, Air Requirements are varied by quality of raw materials and purpose of sorting.
 ※2 Specifications may be changed without notice.



ISO9001

Address: ANZAI MANUFACTURING CO., LTD.
 ANZAI CORPORATION, LTD.
 ALSOMAC ENGINEERING CO., LTD.

Registration Scope:
 Design, Development, Production, Installation and
 Maintenance Service of Sorting Machines.



IROM ITALIA s.r.l.

IMPORT - EXPORT
 RICE MILLING MACHINERY - LABORATORY EQUIPMENT

Via Volturmo, 80 - Fontana Bldg.
 20861 Brugherio (MB) Italy
 tel. 0039 039 87 86 73 fax 0039 039 88 48 28
 info@iromitalia.com www.iromitalia.com